
ARCUS

TAB-EX LED LUMINAIRES

TABLEX™ FOR EX



TABLEX™ FOR HL



TABLEX™ FOR IL



EXPLOSION PROOF EX

HAZARDOUS LOCATION HL

INDUSTRIAL LOCATION IL

REVISED
03-03-20

TAB-EX LED LUMINAIRES

SPECIFICATION

MODEL WATTAGE	RED 7W	GREEN 7W
TOTAL LUMENS PER HEAD	TOTAL LUMENS PER HEAD	
OUTPUT WATTS PER HEAD	4.83 W	
EFFICACY (LM/W)	87.12	
CRI (COLOR RENDITION INDEX)	72	
CCT	5672	
DIMENSIONS	19.75 x 5.63 x 23.88 in (501.65 x 143.00 x 606.55 mm)	
WEIGHT	40.5 LBS	
ENCLOSURE MATERIAL	BODY: A360 ALUMINUM (LESS THAN .4% COPPER CONTENT) WITH BAKED-ON GRAY EPOXY FINISH) GASKET: ONE-PIECE NEOPRENE SIGN: ACRYLIC HARDWARE: STAINLESS STEEL	
MOUNTING	WALL MOUNTING, PENDANT MOUNTING, END MOUNTING	
OPTICS	WIDE NARROW-BEAM	
LED OPTIONS	RED	GREEN
AMBIENT TEMPERATURE RANGE	10˚C TO 45˚C	10˚C TO 35˚C
VOLTAGE/FREQUENCY	120 / 277 V 60HZ 220 – 240 V 50 HZ	
T-RATING	CIDI GROUPS C&D | T6 CIIDI GROUPS E,F,G, CLASS ||| | T6 SIMULTANEOUS, PRESENCE CLASS | I&II | T6	

ETL/cETL CERTIFIED TO:

USCG Regulation 46 CFR Subparts 111.75-15(e) & 112.43
UL 844 Hazardous Locations
UL 1598A Marine Outside Type
UL 1598 Wet Locations
UL 8750 LED Safety
UL 924 Emergency Lighting
CUL
IP65
NEMA 4X

APPROVED FOR:

Class I, Division 1, Groups C & D
Class II, Division 1, Groups E, F & G
Class III
Class I, Zone 1, Groups IIA, IIB

ARCUS Tab-EX LED BENEFITS:

Two high lumen spot lights can be adjusted in horizontal and vertical planes

Independent battery backup system for exit signs and spotlights

Unit can power up to two optional remote spot lights

Field replaceable LED circuit boards and drivers with quick disconnects

Emergency battery back-up integral to sign (no additional enclosure required)

3-hour emergency operation

Edge-lit sign

APPLICATION

Waste Water Treatment

Oil and Gas Refining

Hazardous Locations

Hazardous Storage

Marine, Engine and Battery Rooms

Manufacturing Facilities

(858) 353-1073
SALES@ARCUSLIGHT.COM
10457 ROSELLE STREET, SUITE #E
SAN DIEGO, CA, 92121

TAB-EX LED LUMINAIRES

ORDERING INFORMATION: PART NUMBER EXAMPLE TAB-EX-WM-1-2-RV-R-7W-S

1	2	3	4	5	6	7	8	9
TAB	EX	WM	1	2	RV	R	7W	S

DETAILED INFORMATION

2 FAMILY NAME ENCLOSURE TYPE

EX (Explosion Proof Rated Body)

3 MOUNTING

WM Wall Mount
CM Ceiling Mount

4 NUMBER OF FACES

1
2

5 NUMBER OF HEADS

0
2

6 VOLTAGE

RV 120-277 VAC, 60 Hz

7 LEGEND COLOR

N None (For 0 Faces)
R Red
G Green

8 WATTAGE

7W 7 Watts

9 BODY COLOR

S Silver (Standard)

PROJECT INFORMATION

PROJECT NAME:

LOCATION:

DESCRIPTION:

CONTACT INFORMATION:

NAME:


E-MAIL:


PHONE:

DATE:

TAB-EX LED LUMINAIRES

TAB-EX

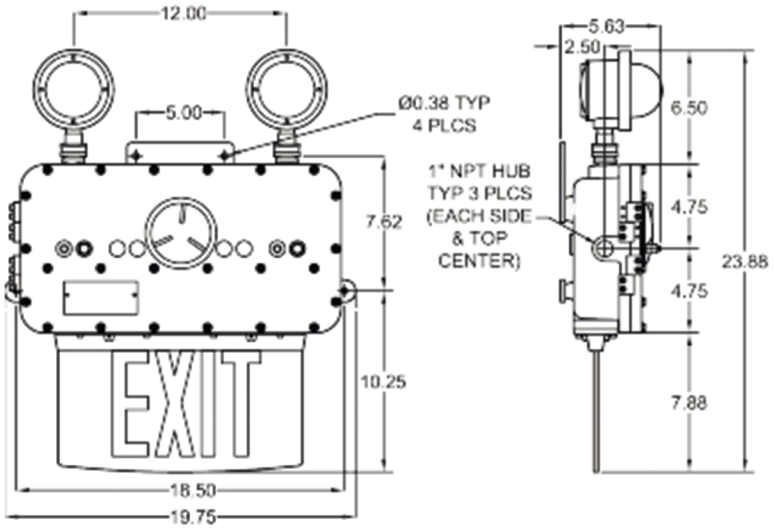

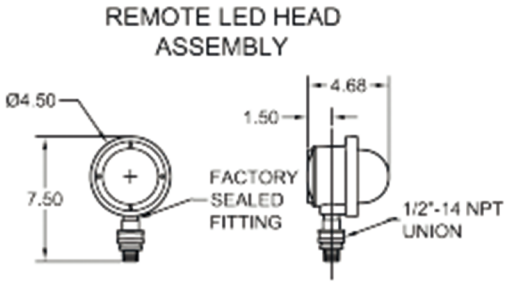

CONTACTS

(858) 353-1073

SALES@ARCUSLIGHT.COM

10457 ROSELLE STREET, SUITE #E
SAN DIEGO, CA 92121