
ARCUS

TAB-IL LED LUMINAIRES

TABLEX™ FOR EX



TABLEX™ FOR HL



TABLEX™ FOR IL



EXPLOSION PROOF EX

HAZARDOUS LOCATION HL

INDUSTRIAL LOCATION IL

REVISED
03-03-20

SPECIFICATION

DIMENSIONS	9.25 X 13.25 X 3.5 IN (4.38 X 4.75 X 2.25 IN) 234.95 X 336.55 X 88.9 MM (111.25 X 120.65 X 57.15 MM)
LEGEND COLOR	RED GREEN
CONSTRUCTIONS	FULLY GASKETED HOUSING FRAME FACEPLATE: HEAVY-DUTY, VANDAL-RESISTANT POLYCARBONATE BACKPLATE: HEAVY-DUTY ALUMINUM STAINLESS STEEL TAMPER-PROOF SCREWS 6 INCH EXIT LETTERING LEGEND, AVAILABLE IN RED OR GREEN FIELD-SELECTABLE CHEVRONS
ELECTRONICS	MAGNETIC TEST SWITCH STANDARD ADVANCED DIAGNOSTICS (NON-AUDIBLE) OPTIONAL NEXUS® MONITORING SYSTEM 120/277 60HZ
MOUNTING	SURFACE MOUNT JUNCTION BOX INCLUDED FOR WALL, END OF CEILING MOUNT APPLICATIONS 1/2 INCH CONDUIT KNOCK-OUT ENTRY ON TOP AND SIDES
BATTERY TYPE	SVXHZ AC-ONLY SVXNHZ SELF-POWERED
WARRANTY	FIVE-YEAR LIMITED WARRANTY

ETL/cETL CERTIFIED TO:

CSA-US (TO UL 924 STANDARDS)
EVALUATED TO THE UL 844 STANDARD FOR CLASS I DIVISION 2, GROUPS A, B,C AND D
NEC, OSHA AND NEMA COMPLIANT FOR ABOVE CLASSES AND GROUPS
DAMP AND WET LOCATION (50˚F TO 104˚F)
MEETS NFPA101 (LIFE SAFETY CODE), NFPA 70 – NEC AND OSHA ILLUMINATION STANDARDS

APPROVED FOR:

CLASS I DIVISION 2, GROUPS A, B, C AND D HAZARDOUS LOCATION EXIT SIGN

ARCUS TAB-HL LED BENEFITS:

Withstands rugged use with a fully gasketed housing frame; vandal-resistant heavy-duty polycarbonate faceplate; heavy aluminum backplate

Offers versatility with field-selectable chevrons and 6\" EXIT lettering in red or green; special wording panels available

Accommodates surface, wall, end, and ceiling mount installation

Reduces maintenance with standard advanced diagnostics and optional NEXUS ® monitoring system compatibility

CSA-US approved to UL 924 standards; evaluated to the UL 844 standard for Class I Division 2, Groups A, B, C and D; NEC, OSHA and NEMA compliant for stated Classes and Groups; damp and wet location 50°F to 104°F (10°C to 40°C); meets NFPA101 (Life Safety Code), NFPA 70-NEC and OSHA illumination standards
Five-year limited warranty

APPLICATION

Waste Water Treatment

Oil and Gas Refining

Hazardous Locations

Hazardous Storage

Marine, Engine and Battery Rooms

Manufacturing Facilities

(858) 353-1073
SALES@ARCUSLIGHT.COM
10457 ROSELLE STREET, SUITE #E
SAN DIEGO, CA, 92121

TAB-IL LED LUMINAIRES

FOR INDUSTRIAL LOCATIONS IL
EXIT SIGN EXIT

ORDERING INFORMATION: PART NUMBER EXAMPLE TAB-IL-WM-1-RV-BB-R-D-S

1	2	3	4	5	6	7	8	9
TAB	IL	WM	1	RV	AC	R	1,5	S

DETAILED INFORMATION

2 FAMILY NAME ENCLOSURE TYPE

IL (Industrial Location)

3 MOUNTING

WM Wall Mount
CM Ceiling Mount

4 NUMBER OF FACES

1
2

5 VOLTAGE

RV 120-277 VAC, 60 Hz

6 SERIES

AC Standard power
BB Battery Backup

7 LEGEND COLOR

R Red
G Green

8 DIAGNOSTIC

N No Diagnostics
D Diagnostics*

9 BODY COLOR

S Silver (Standard)

*– Self-powered only

PROJECT INFORMATION

PROJECT NAME:

LOCATION:

DESCRIPTION:

CONTACT INFORMATION:


NAME:

E-MAIL:

PHONE:

DATE:

TAB-IL

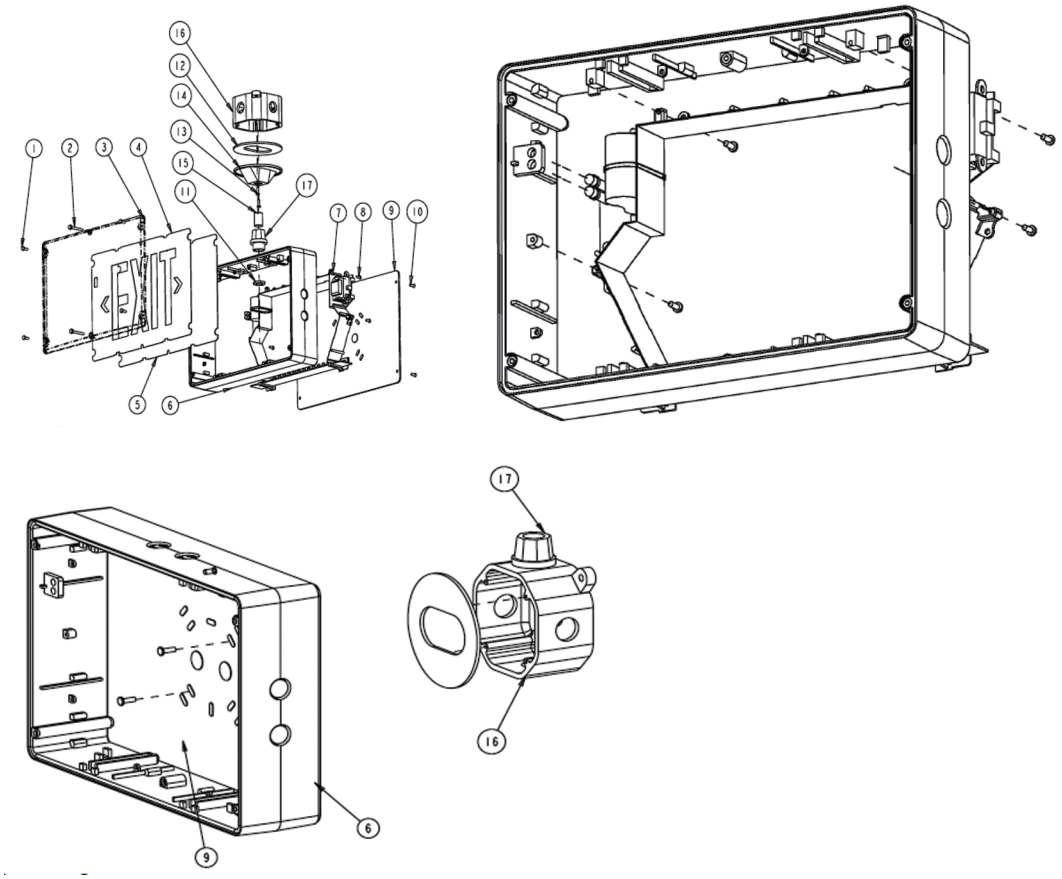

CONTACTS

(858) 353-1073

SALES@ARCUSLIGHT.COM

10457 ROSELLE STREET, SUITE #E
SAN DIEGO, CA 92121